

# AIREX TITANOUTLET™

Seals HVAC Piping Wall Penetrations

Energy Efficient Product 

**30%**  
Energy  
Savings  
Mandate\*



TGS Series

U.S. Patents #9,091,377 B2  
#9,523,200 B2



TSS Series

Siding or  
Compact  
Applications

## TITAN OUTLET™

### Seals Piping Wall Penetrations

- Superior Durable Quality with U/V Resistance & High Impact Strength Design
- Gasket Compression System Seals Wall Air Leakage & Weather Moisture Wall Damage
- Flexible Elastomeric Outlet Sleeve Design Prevents Air Infiltration & Rodent Intrusion
- Design Supports HVAC Systems with Wall Isolation & Anti-Vibration Features
- Flexible Sleeve Reduces Piping Vibration & Noise
- Seals to Protect Indoor Air Quality

## Meets New Code Requirements:

- ✓ Building Codes
- ✓ Energy Codes
- ✓ Residential Codes
- ✓ Mechanical Codes
- ✓ Green Codes

### 2012, 2015, 2018 International Energy Conservation Code (IECC)

#### Air Leakage (Mandatory): Residential Section 402.4

The *building thermal envelope* shall be constructed to limit air leakage in accordance with the requirements of Sections R402.4.1 through R402.4.4.

#### Air Barrier Construction: Commercial Section C402.5.1.1

Penetrations of the air barrier shall be caulked, gasketed or sealed in a manner compatible with the construction materials and locations...



Applications for:



Mini-Split  
Systems

Central  
Systems

## Weather Damage Protection



## Residential

## Commercial

## Multi-Family Units

### Codes & Standards Compliance

#### Air Leakage and Wall Penetration Compliance per:

- IBC - 2006, 2009, 2012, 2015, 2018 Chapter 13
- IRC - 2006, 2009, 2012, 2015, 2018 Chapter 11 Part IV Energy Efficiency - Section N1101 General - N1101.1 Scope - Air Leakage Section N1102.4 Section N1102.4.1 - Building Thermal Envelope - (1. All joints, seams, penetrations) Chapter 11 Refrigeration Section 1101.0 Scope - 1101.3 Protection
- IECC - 2012, 2015, 2018 Air Leakage (Mandatory) - Residential Section 402.4.1 and 402.4.1.1 Building Thermal Envelope - Penetrations
- IECC - 2012, 2015, 2018 Air Leakage (Mandatory) - Commercial Section C402.4.3 and C402.4.2 Building Thermal Envelope - Penetrations
- IMC - 2006, 2009, 2012, 2018 Chapter 3 General Regulations Section 301.1 Scope - Sections 301.10, 301.11, 301.14, 301.15, 305.1, 305.2, 305.4
- UMC - 2006, 2009, 2012, 2018 Chapter 11 Refrigeration - Section 1101.0 Scope - Section 1101.1 - General Requirements Section 1106.0 - Section 1106.2, Section 1111.0 Erection of Refrigerant Piping - Sections 1111.1, 1111.2, 1111.4
- California Building Energy Efficiency Standards (Title 24 Energy Code) 2016, 2019 Part 6 Section 110.7 - Mandatory Requirements to Limit Air Leakage

### Approved Material & Performance Testing

- ASTM E283 - Standard Test Method for Air Leakage
- ASTM E331 - Standard Test Method for Water Penetration
- ASTM E 2178 - Air Permeance of Building Materials

#### Wall Mounted Outlet (Outdoor-Rated Rigid Plastic)

- ASTM D1525C-09 - Temperature Deformation Test
- ASTM D648-07 - Temperature Load Deformation Test
- UL 94 HB - Flammability Test
- UL 746C - Outdoor Suitability - f1 Rating

#### Wall Outlet Sleeve (Outdoor-Rated Elastomeric Plastic)

- ASTM D573-04 - Deterioration Test
- ASTM D746-07 - Brittleness Temperature Impact Test

\*Based on HVAC Industry and Manufacturer's Independent Study on a Combined ROI & Sustainable Energy Savings Calculation. A contributing product to the U.S. Energy Department's 30% Energy Savings Solution Initiative.



**AIREX**  
Manufacturing Inc.

72170 Dunham Way, Suite D | Thousand Palms, CA 92276 | (760) 343-2277 | FAX (760) 501-7912 | [www.airexmfg.com](http://www.airexmfg.com)

Copyright © 2017 Airex Manufacturing, Inc.

# HVAC Pipe Penetration Wall Seal



## SUBMITTAL SHEET




Project \_\_\_\_\_


Contractor \_\_\_\_\_

Date \_\_\_\_\_

Specification Reference \_\_\_\_\_

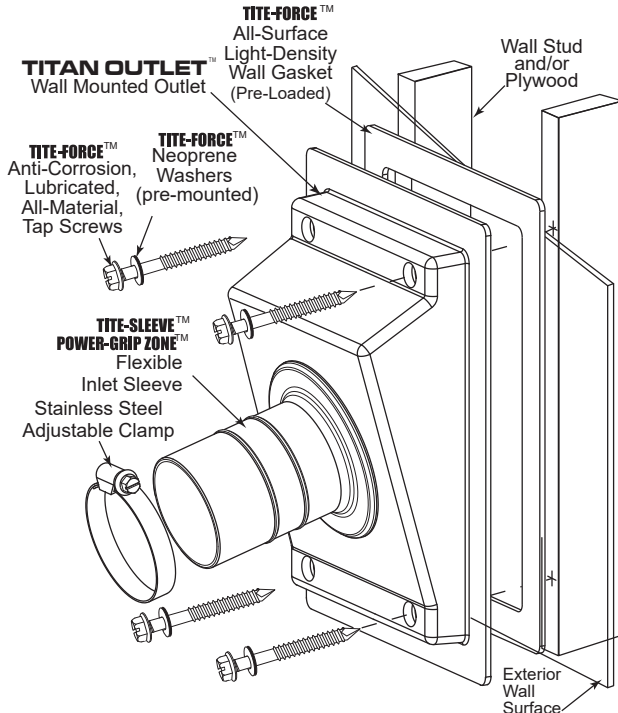

### Refrigeration Pipe Penetration Detail

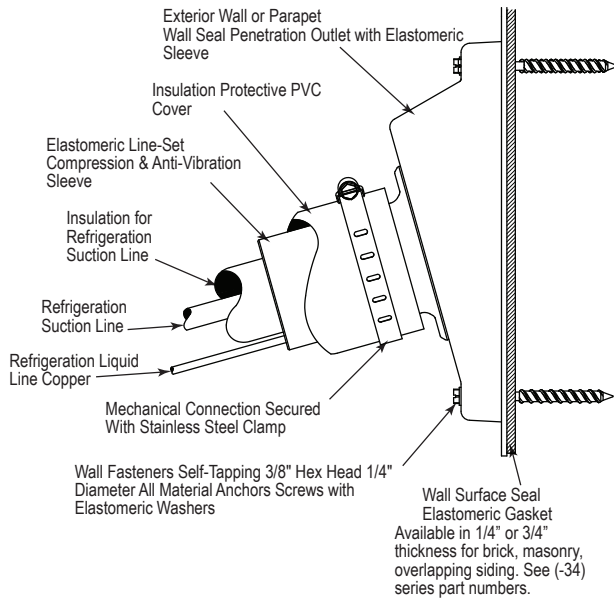

### TITAN OUTLET MODEL NUMBERS

Airex Part Number	Model TGS: Stucco, Masonry Applications
<b>TGS-550-G</b>	(Fits: 1/2" wall thickness pipe insulation with 5/8", 3/4", 7/8" tube)
<b>TGS-575-G</b>	(Fits: 3/4" wall thickness pipe insulation with 5/8", 3/4", 7/8" tube or 1/2" wall thickness pipe insulation with 1-1/8" tube)
<b>TGS-510-G</b>	(Fits: 1" wall thickness pipe insulation with 3/4", 7/8" tube or 3/4" wall thickness pipe insulation with 1-1/8" tube)

Airex Part Number	Model TSS: Limited Space & Compact Applications
<b>TSS-550-G</b>	(Fits: 1/2" wall thickness pipe insulation with 5/8", 3/4", 7/8" tube)
<b>TSS-575-G</b>	(Fits: 3/4" wall thickness pipe insulation with 5/8", 3/4", 7/8" tube or 1/2" wall thickness pipe insulation with 1-1/8" tube)

Airex Part Number	Model TGS 3/4" Gasket: Brick, Masonry, Overlapping Siding Applications
<b>TGS-550-G-34</b>	(Fits: 1/2" wall thickness pipe insulation with 5/8", 3/4", 7/8" tube)
<b>TGS-575-G-34</b>	(Fits: 3/4" wall thickness pipe insulation with 5/8", 3/4", 7/8" tube or 1/2" wall thickness pipe insulation with 1-1/8" tube)
<b>TGS-510-G-34</b>	(Fits: 1" wall thickness pipe insulation with 3/4", 7/8" tube or 3/4" wall thickness pipe insulation with 1-1/8" tube)

### TITAN OUTLET™ Color Options


Gray - G

White - W

Substitute (G) with (W) for White

### Product Description and Specification


**AIREX TITAN OUTLET™** - A wall outlet seal by Airex Manufacturing Inc., shall be provided and installed with its compression gasket mounting method and must be fastened to wall surface with supplied ICC-ES listed and approved non-corrosive screws with pre-loaded neoprene washers. Wall Outlet must also integrate an over-molded, flexible, elastomeric sleeve for sealing, supporting and isolating refrigerant pipes to also control vibration. The Wall Outlet shall also feature outdoor-rated durability and shall provide wall expansion and contraction protection features achieved by gaskets and seals as per energy code requirements. A stainless steel clamp must be utilized to create a "Mechanical Connection" between wall seal and pipe insulation protector as intended per energy codes to allow removable/reusable maintenance capabilities and designed to co-act with the AIREX E-FLEX GUARD™ Pipe Insulation Protection Cover. Wall Outlet seal and insulation protector must both be sustainably and securely installed, mechanically fastened together as one, due to piping vibration, and shall be assembled without the use of adhesives or adhesive tapes as per energy code requirements. **Wall Outlet shall be tested and must meet the following testing: ASTM E 331 (Water Penetration), ASTM E 283 (Air Leakage), and ASTM E 2178 - Air Permeance of Building Materials.**



### TGS Model Series Sleeve Diameters

Airex Part Number	Sleeve Diameter		Insulation Thickness
<b>TGS-550-G</b>	1.70"	1-11/16"	1/2"
<b>TGS-575-G</b>	2.375"	2-3/8"	3/4"
<b>TGS-510-G</b>	3.1875"	3-3/16"	1"

Diameters are the same for (-34) series, 3/4" Gasket.



### TSS Model Series Sleeve Diameters

Airex Part Number	Sleeve Diameter		Insulation Thickness
<b>TSS-550-G</b>	1.70"	1-11/16"	1/2"
<b>TSS-575-G</b>	2.375"	2-3/8"	3/4"

### Approved Material & Performance Testing

#### Product Performance Testing

- ASTM E283 - Standard Test Method for Air Leakage
- ASTM E331 - Standard Test Method for Water Penetration of Exterior Walls by Uniform Static Air Pressure
- ASTM E 2178 - Air Permeance of Building Materials

#### Polymer Material Testing


##### Wall Mounted Outlet (Rigid Plastic)

- ASTM D1525C-09 - Temperature Deformation Test
- ASTM D648-07 - Temperature Load Deformation Test
- UL 94 HB - Flammability Test
- UL 746C - Outdoor Suitability - f1 Rating

##### Wall Outlet Sleeve (Elastomeric Polymer)

- ASTM D573-04 - Deterioration Test
- ASTM D746-07 - Brittleness Temperature Impact Test

**TGS Series Outlet Flexible Sleeve**  
Can accommodate Dual Mini-Split piping.



**TGS -34 Series Outlet**  
3/4" thick Gasket for Overlapping Siding, Brick and Masonry.



72170 Dunham Way, Suite D, Thousand Palms, CA 92276 Phone: (760) 343-2277 Fax: (760) 501-7912

Airex Manufacturing, Inc. Reserves the right to make changes or improvements at any time without notice.

Copyright © 2017 Airex Manufacturing Inc.





# AIREX TITANOUTLET™

Seals HVAC Piping Wall Penetrations

Energy Efficient Product



**30%**  
Energy  
Savings  
Mandate\*



TGS Series

U.S. Patents #9,091,377 B2  
#9,523,200 B2



TSS Series

Siding or  
Compact  
Applications

## TITAN OUTLET™

### Seals Piping Wall Penetrations

- Superior Durable Quality with U/V Resistance & High Impact Strength Design
- Gasket Compression System Seals Wall Air Leakage & Weather Moisture Wall Damage
- Flexible Elastomeric Outlet Sleeve Design Prevents Air Infiltration & Rodent Intrusion
- Design Supports HVAC Systems with Wall Isolation & Anti-Vibration Features
- Flexible Sleeve Reduces Piping Vibration & Noise
- Seals to Protect Indoor Air Quality

## Meets New Code Requirements:

- ✓ Building Codes
- ✓ Energy Codes
- ✓ Residential Codes
- ✓ Mechanical Codes
- ✓ Green Codes

### 2012, 2015, 2018 International Energy Conservation Code (IECC)

#### Air Leakage (Mandatory): Residential Section 402.4

The building thermal envelope shall be constructed to limit air leakage in accordance with the requirements of Sections R402.4.1 through R402.4.4.

#### Air Barrier Construction: Commercial Section C402.5.1.1

Penetrations of the air barrier shall be caulked, gasketed or sealed in a manner compatible with the construction materials and locations...



Applications for:



Mini-Split  
Systems

Central  
Systems

## Weather Damage Protection



## Residential

## Commercial

## Multi-Family Units

### Codes & Standards Compliance

#### Air Leakage and Wall Penetration Compliance per:

- IBC - 2006, 2009, 2012, 2015, 2018 Chapter 13
- IRC - 2006, 2009, 2012, 2015, 2018 Chapter 11 Part IV Energy Efficiency - Section N1101 General - N1101.1 Scope - Air Leakage Section N1102.4 Section N1102.4.1 - Building Thermal Envelope - (1. All joints, seams, penetrations) Chapter 11 Refrigeration Section 1101.0 Scope - 1101.3 Protection
- IECC - 2012, 2015, 2018 Air Leakage (Mandatory) - Residential Section 402.4.1 and 402.4.1.1 Building Thermal Envelope - Penetrations
- IECC - 2012, 2015, 2018 Air Leakage (Mandatory) - Commercial Section C402.4.3 and C402.4.2 Building Thermal Envelope - Penetrations
- IMC - 2006, 2009, 2012, 2018 Chapter 3 General Regulations Section 301.1 Scope - Sections 301.10, 301.11, 301.14, 301.15, 305.1, 305.2, 305.4
- UMC - 2006, 2009, 2012, 2018 Chapter 11 Refrigeration - Section 1101.0 Scope - Section 1101.1 - General Requirements Section 1106.0 - Section 1106.2, Section 1111.0 Erection of Refrigerant Piping - Sections 1111.1, 1111.2, 1111.4
- California Building Energy Efficiency Standards (Title 24 Energy Code) 2016, 2019 Part 6 Section 110.7 - Mandatory Requirements to Limit Air Leakage

### Approved Material & Performance Testing

- ASTM E283 - Standard Test Method for Air Leakage
- ASTM E331 - Standard Test Method for Water Penetration
- ASTM E 2178 - Air Permeance of Building Materials

#### Wall Mounted Outlet (Outdoor-Rated Rigid Plastic)

- ASTM D1525C-09 - Temperature Deformation Test
- ASTM D648-07 - Temperature Load Deformation Test
- UL 94 HB - Flammability Test
- UL 746C - Outdoor Suitability - f1 Rating

#### Wall Outlet Sleeve (Outdoor-Rated Elastomeric Plastic)

- ASTM D573-04 - Deterioration Test
- ASTM D746-07 - Brittleness Temperature Impact Test

\*Based on HVAC Industry and Manufacturer's Independent Study on a Combined ROI & Sustainable Energy Savings Calculation. A contributing product to the U.S. Energy Department's 30% Energy Savings Solution Initiative.



**AIREX**  
Manufacturing Inc.

72170 Dunham Way, Suite D | Thousand Palms, CA 92276 | (760) 343-2277 | FAX (760) 343-5599 | [www.airexmfg.com](http://www.airexmfg.com)


Copyright © 2017 Airex Manufacturing, Inc.

# HVAC Pipe Penetration Wall Seal




## SUBMITTAL SHEET

Project	_____
Contractor	_____
Date	_____
Specification Reference	_____
Comments	_____

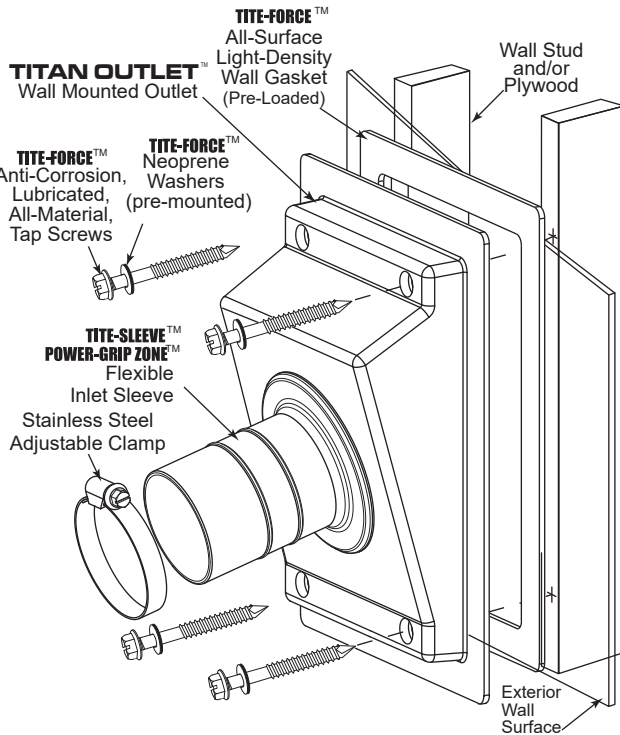

### Refrigeration Pipe Penetration Detail

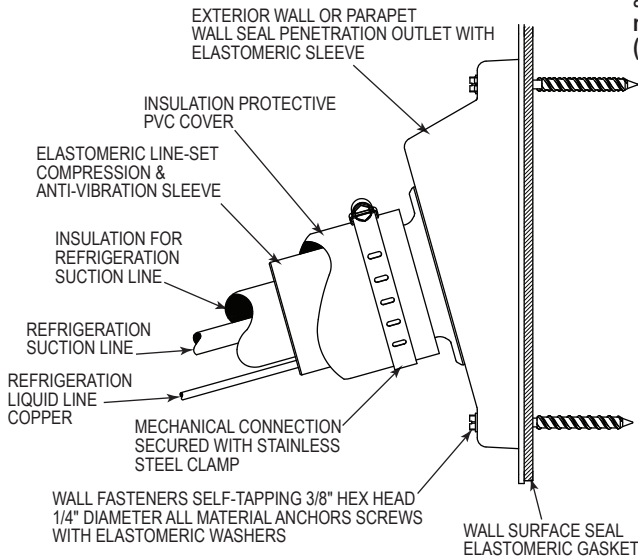

### TITAN OUTLET MODEL NUMBERS

Airex Part Number	Model TGS: Stucco, Masonry Applications
<b>TGS-550-W</b>	(Fits: 1/2" wall thickness pipe insulation with 5/8", 3/4", 7/8" tube)
<b>TGS-575-W</b>	(Fits: 3/4" wall thickness pipe insulation with 5/8", 3/4", 7/8" tube or 1/2" wall thickness pipe insulation with 1-1/8" tube)
<b>TGS-510-W</b>	(Fits: 1" wall thickness pipe insulation with 3/4", 7/8" tube or 3/4" wall thickness pipe insulation with 1-1/8" tube)

#### TITAN OUTLET™ Color Options

Gray - G
White - W
Substitute (G) with (W) for White

Airex Part Number	Model TSS: Siding, Compact Applications
<b>TSS-550-W</b>	(Fits: 1/2" wall thickness pipe insulation with 5/8", 3/4", 7/8" tube)
<b>TSS-575-W</b>	(Fits: 3/4" wall thickness pipe insulation with 5/8", 3/4", 7/8" tube or 1/2" wall thickness pipe insulation with 1-1/8" tube)

### Product Description and Specification

**AIREX TITAN OUTLET™** - A wall outlet seal by Airex Manufacturing Inc., shall be provided and installed with its compression gasket mounting method and must be fastened to wall surface with supplied ICC-ES listed and approved non-corrosive screws with pre-loaded neoprene washers. Wall Outlet must also integrate an over-molded, flexible, elastomeric sleeve for sealing, supporting and isolating refrigerant pipes to also control vibration. The Wall Outlet shall also feature outdoor-rated durability and shall provide wall expansion and contraction protection features achieved by gaskets and seals as per energy code requirements. A stainless steel clamp must be utilized to create a "Mechanical Connection" between wall seal and pipe insulation protector as intended per energy codes to allow removable/reusable maintenance capabilities and designed to co-act with the AIREX E-FLEX GUARD™ Pipe Insulation Protection Cover. Wall Outlet seal and insulation protector must both be sustainably and securely installed, mechanically fastened together as one, due to piping vibration, and shall be assembled without the use of adhesives or adhesive tapes as per energy code requirements. **Wall Outlet shall be tested and must meet the following testing: ASTM E 331 (Water Penetration), ASTM E 283 (Air Leakage), and ASTM E 2178 - Air Permeance of Building Materials.**

#### TGS Model Series Sleeve Diameters

Airex Part Number	Sleeve Diameter	Insulation Thickness
<b>TGS-550-W</b>	1.70"	1-11/16"
<b>TGS-575-W</b>	2.375"	2-3/8"
<b>TGS-510-W</b>	3.1875"	3-3/16"

#### TSS Model Series Sleeve Diameters

Airex Part Number	Sleeve Diameter	Insulation Thickness
<b>TSS-550-W</b>	1.70"	1-11/16"
<b>TSS-575-W</b>	2.375"	2-3/8"

### Approved Material & Performance Testing

#### Product Performance Testing

- ASTM E283 - Standard Test Method for Air Leakage
- ASTM E331 - Standard Test Method for Water Penetration of Exterior Walls by Uniform Static Air Pressure
- ASTM E 2178 - Air Permeance of Building Materials

#### Plastic Material Testing

- Wall Mounted Outlet (Rigid Plastic)**
  - ASTM D1525C-09 - Temperature Deformation Test
  - ASTM D648-07 - Temperature Load Deformation Test
  - UL 94 HB - Flammability Test
  - UL 746C - Outdoor Suitability - f1 Rating
- Wall Outlet Sleeve (Elastomeric Plastic)**
  - ASTM D573-04 - Deterioration Test
  - ASTM D746-07 - Brittleness Temperature Impact

U.S. Patents #9,091,377 B2, #9,523,200 B2



72170 Dunham Way, Suite D, Thousand Palms, CA 92276 Phone: (760) 343-2277 Fax: (760) 343-5599

Airex Manufacturing, Inc. Reserves the right to make changes or improvements at any time without notice.

Copyright © 2017 Airex Manufacturing Inc.

